

2025

PRODUCT CATALOG



www.ydj-light.com




Enterprise WeChat

Fujian YDJ Light Co., Ltd.
e-mail: marketing@ydj-light.com
Fuzhou-China

YDJ Light

Functional Lighting-Convenience & Happniess

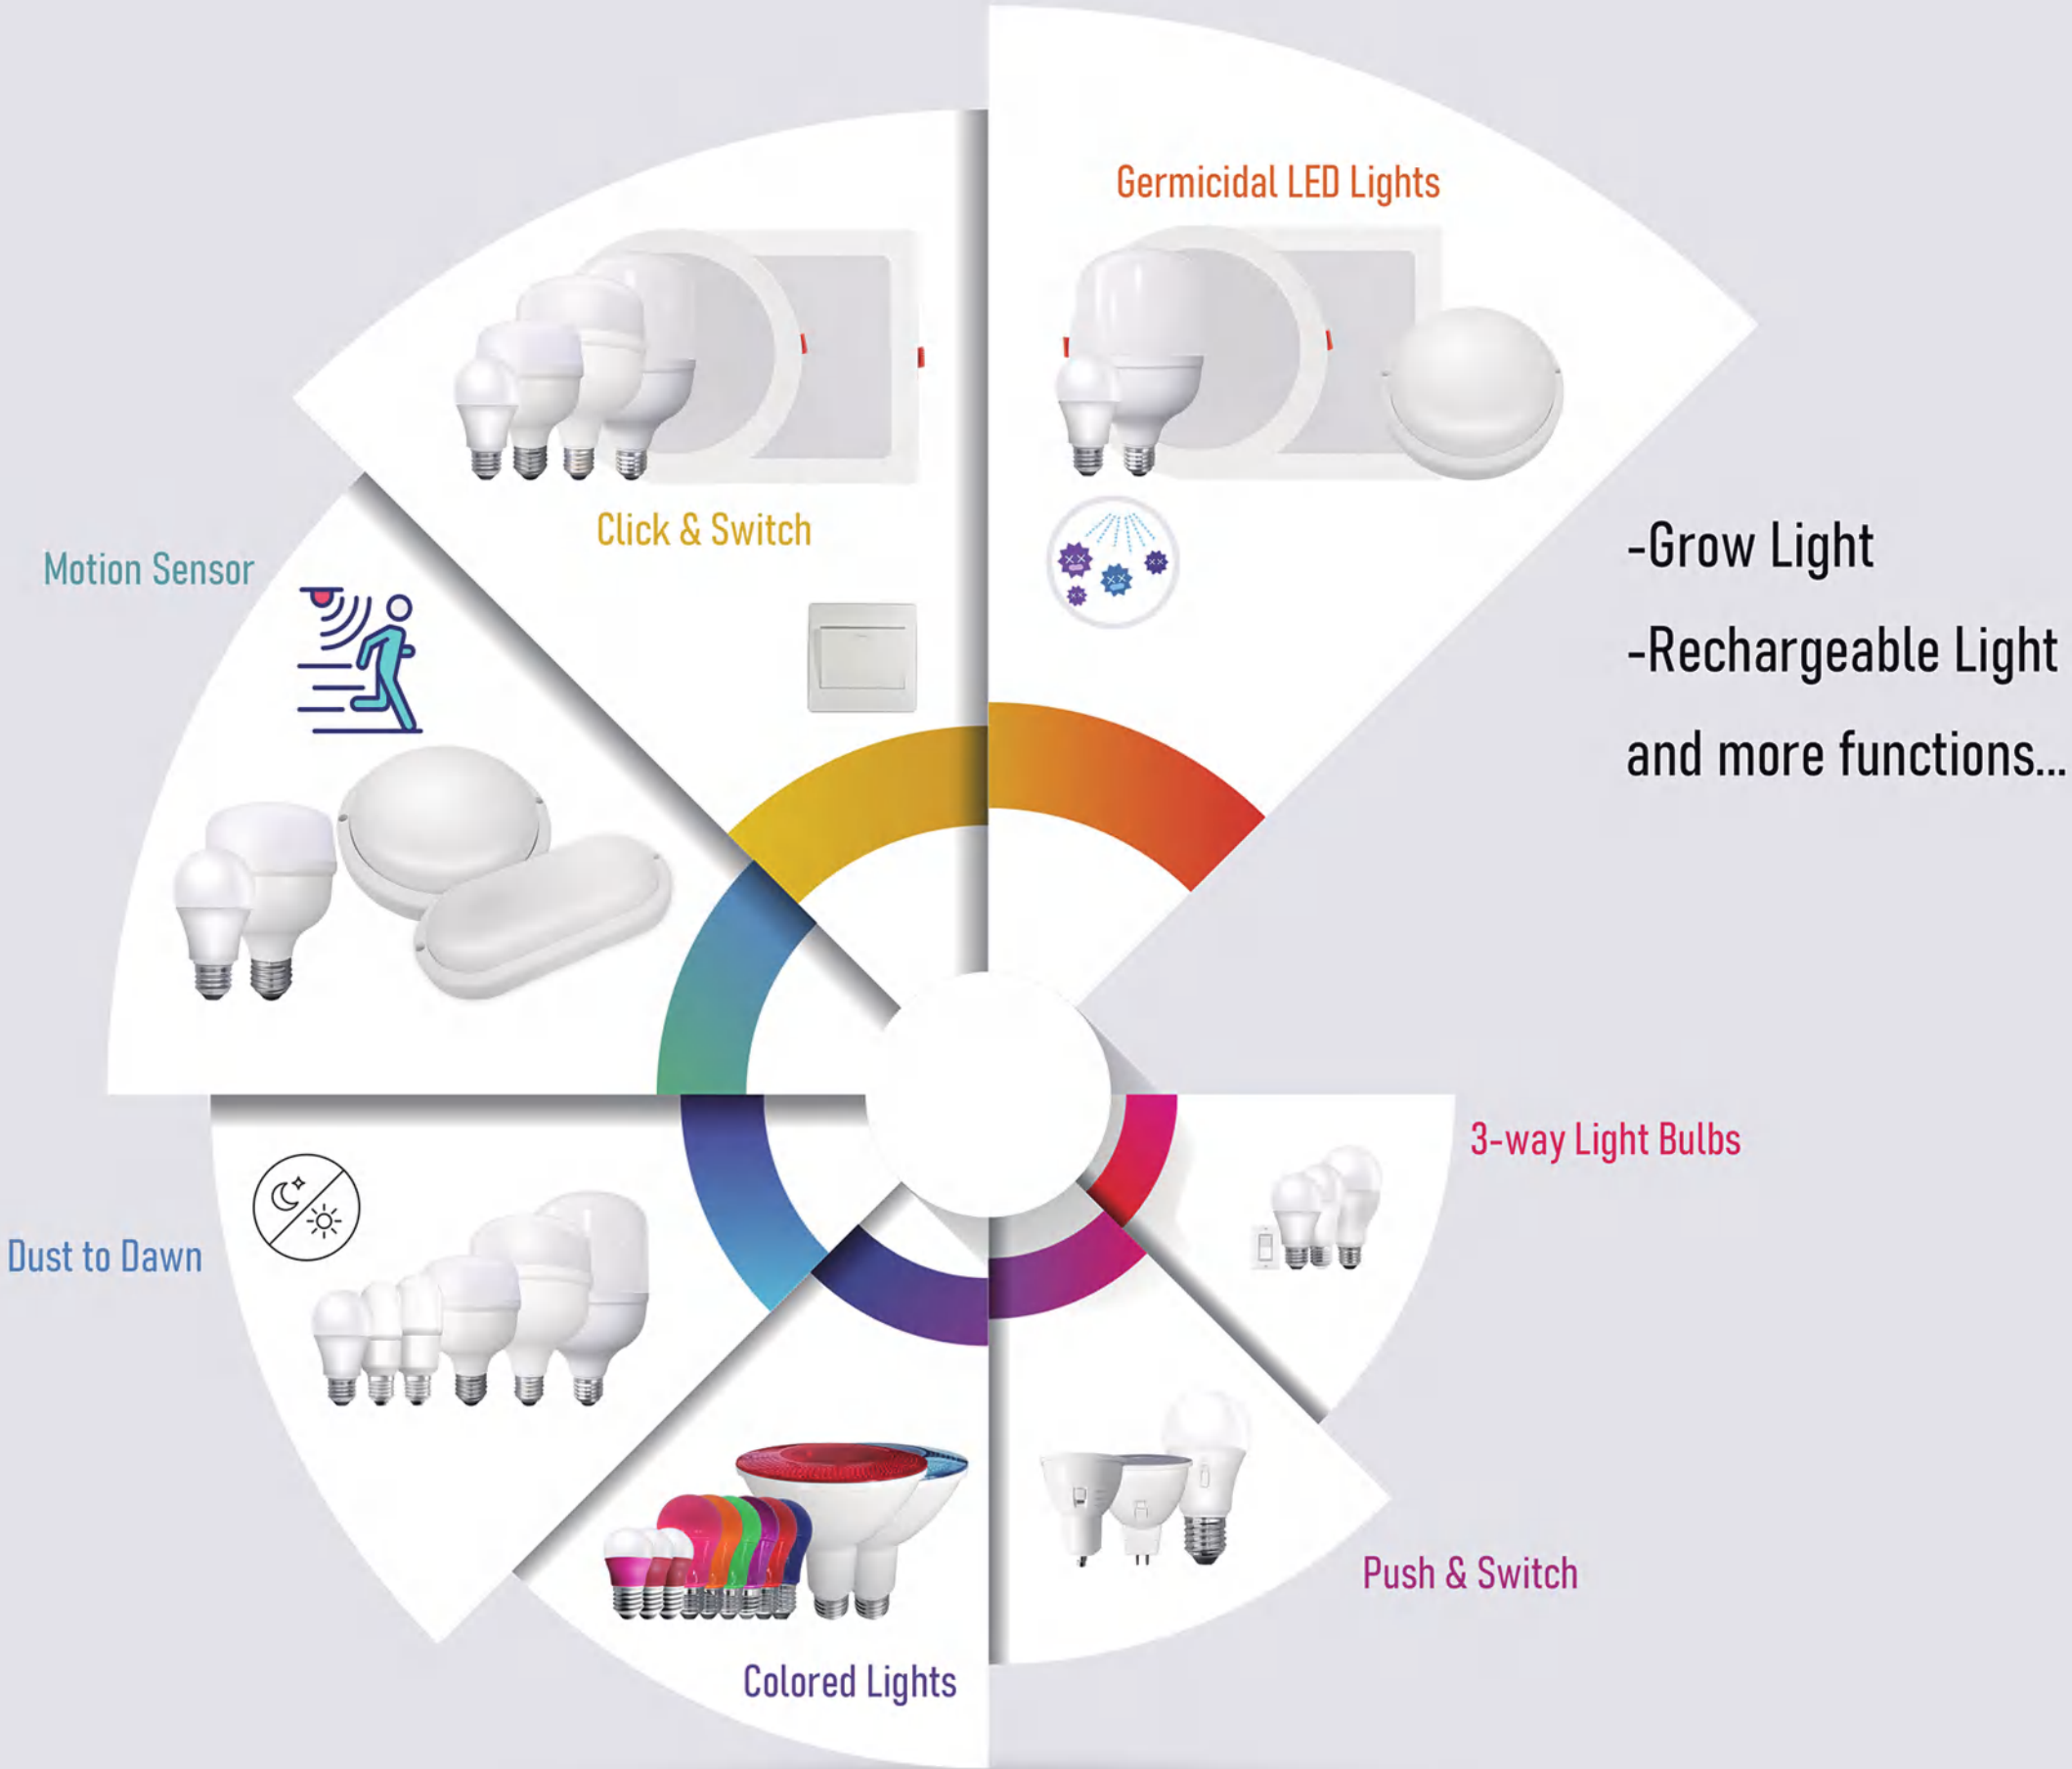

Functional Lighting



3-way Light Bulbs

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-A60D70-D180W-9	3/6/9W	300/600/900	180	D:60	H:105	0.5	3-way
L-A7004-D300D-18W	6/12/18	450/800/1600	180	D:68	H:124	0.9	3-way
L-A70D0688-D220W-7/15/23	7/15/23	800/1600/2600	220	D:74	H:139	0.7/0.9	3-way

Voltage: 120V


Color/CCT: 2700K | 3000K | 4000K | 5000K

CRI: 80

Lamp Base: E26 3-way



Functional Lighting

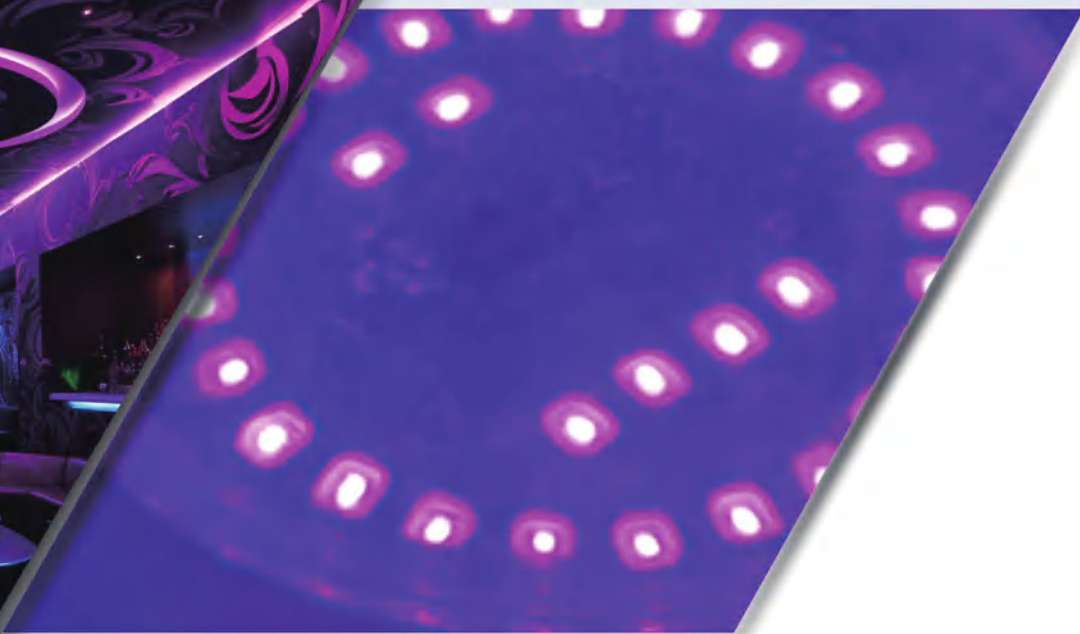

Black Light Bulb



Voltage: 120V
Color/CCT: UVA紫光(100000K)
CRI: NA
Lamp Base: E26

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)	Power Factor	Dimmable
L-A60127-D180-10	10	9.5	180	D:60 H:107	0.5	N

Functional Lighting

Colored lights



Voltage: 220-240V | 110-130V | 110-220V
CRI: 80
Lamp Base: E27 | E26 | B22

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-P4542R-D180-04	4	100	180	D:45	H:81	0.5	N
L-P4542Y-D180-04	4	100	180	D:45	H:81	0.5	N
L-P4542B-D180-04	4	100	180	D:45	H:81	0.5	N
L-P4542G-D180-04	4	100	180	D:45	H:81	0.5	N



Voltage: 220-240V | 110-130V | 110-220V
CRI: 80
Lamp Base: E27 | E26 | B22

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-A60R04-D180-7	7	300	180	D:60	H:107	0.5	N
L-A60P04-D180-7	7	100	180	D:60	H:107	0.5	N
L-A60E04-D180-7	7	250	180	D:60	H:107	0.5	N
L-A60H04-D180-7	7	700	180	D:60	H:107	0.5	N



Voltage: 220-240V | 110-130V | 110-220V
CRI: 80
Lamp Base: E27 | E26 | B22

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-PAR38DR15-D40-15	15	250	40	D:120	H:129	0.5	N
L-PAR38DY15-D40-15	15	900	40	D:120	H:129	0.5	N
L-PAR38DB15-D40-15	15	100	40	D:120	H:129	0.5	N
L-PAR38DG15-D40-15	15	1000	40	D:120	H:129	0.5	N

Functional Lighting

Motion Sensor

Voltage: 220-240V | 110-130V | 110-220V

Color/CCT: 2700K | 3000K | 4000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
A60	8	600	180	D:60	H:109	0.5	N
A60	10	806	180	D:60	H:109	0.5	N
A60	12	1055	180	D:60	H:109	0.5	N
A60	15	1521	180	D:60	H:109	0.5	N
T80S	30	2400	180	D:80	H:114	0.5	N
T100S	40	3200	180	D:100	H:148	0.5	N
T120S	50	4000	180	D:118	H:169	0.5	N
L-FDD6001-D120D-15	15	1050	120	D:168	H:30	0.5	N
L-FDD8001-D120D-20	20	2000	120	D:214	H:30	0.5	N
L-FDDS6001-D120D-15	15	1050	120	D:165	H:32	0.5	N
L-FDDS8001-D120D-20	20	1400	120	D:210	H:32	0.5	N

- Movement detected distance: 5-8m
- Activated at 10lux
- Last for 15-20 seconds until no movement is detected



Feature:

- Build-in motion and light sensor
- Automatic turn on at night and active by movement detected.
- Application: Warehouse, Doorway, Patio, Driveway, Yard, Garage, Kitchen and Toilet

Functional Lighting

Dusk to Dawn



Voltage: 220-240V | 110-130V | 110-220V
Color/CCT: 2700K | 3000K | 4000K | 5000K | 6500K
CRI: 80
Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
A60	8	600	180	D:60	H:109	0.5	N	T4001	10	1050	200	D:41	H:114	0.5	N
A60	10	806	180	D:60	H:109	0.5	N	T4002	12	1300	200	D:46	H:121	0.5	N
A60	12	1055	180	D:60	H:109	0.5	N	T80S	30	2400	180	D:80	H:114	0.5	N
A60	15	1521	180	D:60	H:109	0.5	N	T100S	40	3200	180	D:100	H:148	0.5	N
T4001	9	900	200	D:41	H:114	0.5	N	T120S	50	4000	180	D:118	H:169	0.5	N

Feature:

- Build-in light sensor
- Automatic on/off during night and daytime
- Application: Doorway, Patio,Driveway,Yard and Garage



Functional Lighting

Feature:

- To control brightness or CCT in 3-levels by clicking regular wall switch or table lamp switch
- Automatic memory the last level .
- Application: Reading room, living room, Kitchen, Bathroom, Restaurants, Bar, Shops



Click & Switch

Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80
Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
A60	8	600	180	D:60	H:109	0.5	N
A60	10	806	180	D:60	H:109	0.5	N
A60	12	1055	180	D:60	H:109	0.5	N
A60	15	1521	180	D:60	H:109	0.5	N

Model	Watt	Rated Lumen	CCT	Beam Angle	Dimension (mm)		Power Factor	Dimmable
T80S	10-20-30	800-1600-2400	6500K	180	D:80	H:114	0.5	N
T100S	10-25-40	800-2000-3200	6500K	180	D:100	H:148	0.5	N
T120S	10-30-50	800-2400-4000	6500K	180	D:118	H:169	0.5	N

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-FDD6001-D120D-15	15	1050	120	D:168	H:30	0.5	N
L-FDD8001-D120D-20	20	2000	120	D:214	H:30	0.5	N
L-FDD6001-D120D-15	15	1050	120	D:165	H:32	0.5	N
L-FDD8001-D120D-20	20	1400	120	D:210	H:32	0.5	N
L-RDD6003P-D120D-15	15	1050	120	D:168	H:25	0.5	N
L-RDD8003PE-D120D-20	20	2000	120	D:214	H:26	0.5	N
L-RDD6001-D120D-15	15	1050	120	D:165	H:28	0.5	N
L-RDD8001-D120D-20	20	1400	120	D:210	H:28	0.5	N

Functional Lighting



Rechargeable Emergency Bulbs

Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80
Lamp Base: E27 | E26 | B22



WORK LIKE A FLASHLIGHT



- Feature:
- works as normal LED bulb and can auto self-charging when daily use..
 - Builts in battery backup can lasts for 3-5 hours without power.
 - E27 lamp base fit to most lamp holders.

STAY WITH NATURE



SAFE IN DARKNESS

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Battery Working Hrs
L-A6505-D180D-09	9	630	180	D:65	H:131	>0.5	3-5hrs
L-A6505-D180D-12	12	840	180	D:65	H:131	>0.5	3-5hrs
L-A6505-D180D-15	15	1050	180	D:65	H:131	>0.5	3-5hrs
L-T8009-D180D-20	20	1400	180	D:80	H:143	>0.5	3-5hrs
L-T1009-D180D-30	30	2100	180	D:100	H:176	>0.5	3-5hrs
L-T14018-D180D-50	50	3500	180	D:138	H:232	>0.5	3-5hrs

Functional Lighting

Feature:

- Uses visible light photocatalyst technology to purify indoor air from pollutants and bacteria.
- Saves energy and protects the environment by working under normal indoor light without creating ozone or other pollutants.
- Suitable for various places that need clean and safe air such as homes, plants, schools, hotels, and laboratories.




Germicidal LED Lights




CCT Selectable LED Lamp Series

Classic A Type

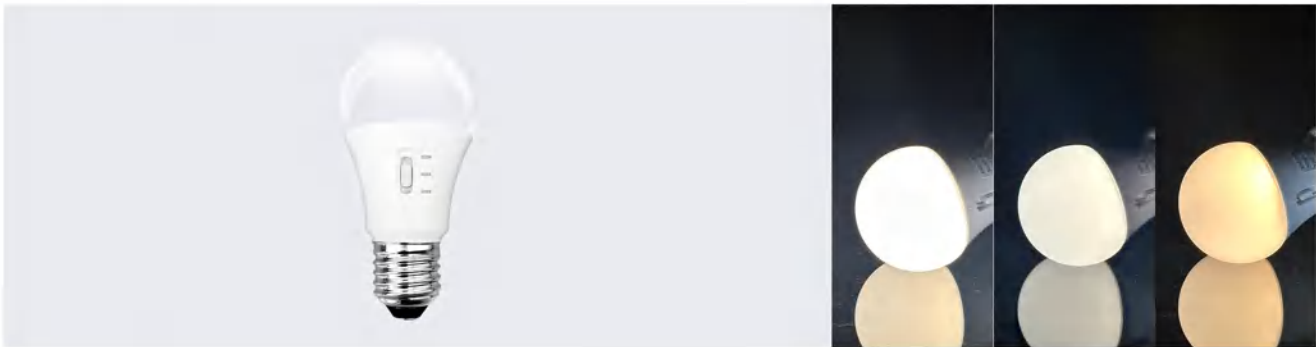

Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
A60	9	800	180	D:60	H:112	0.5	Y	3CCT / 5CCT
A60	10	800	180	D:60	H:112	0.5	Y	3CCT / 5CCT
A60	15	1600	180	D:60	H:120	0.5	Y	3CCT / 5CCT

Decorative Lamp



Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
C37	4	320	230	D:37	H:108	0.5	Y	3CCT
C37	6	470	230	D:37	H:108	0.5	Y	3CCT
P45	4	320	180	D:47	H:88	0.5	Y	3CCT
P45	6	470	180	D:47	H:88	0.5	Y	3CCT

Stick Lamp



Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
T40	7	600	180	D:37	H:115	0.5	Y	3CCT
T40	9	800	180	D:37	H:115	0.5	Y	3CCT
T40	11	1050	180	D:45	H:138	0.5	Y	3CCT
T40	12	1300	180	D:45	H:138	0.5	Y	3CCT
T40	15	1500	180	D:45	H:138	0.5	Y	3CCT

Directional Lamp



Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
PAR20	6	500	40	D:63	H:84	0.5	Y	3CCT
PAR30	11	850	40	D:95	H:120	0.5	Y	3CCT
PAR38	15	1250	40	D:120	H:131	0.5	Y	3CCT

CCT Selectable LED Lamp Series

Spot Lamp



Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
MR16	4	320	60	D:50	H:56	0.5	Y	3CCT
MR16	6	470	60	D:50	H:56	0.5	Y	3CCT
MR16	7	700	60	D:50	H:56	0.5	Y	3CCT
GU10	4	320	60	D:50	H:60	0.5	Y	3CCT
GU10	6	470	60	D:50	H:60	0.5	Y	3CCT
GU10	7	700	60	D:50	H:60	0.5	Y	3CCT

GX53 Type



Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80

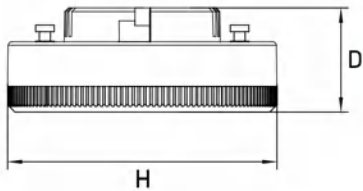


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
GX53	6	480	110	D:73	H:28	0.5	Y	3CCT
GX53	8	640	110	D:73	H:28	0.5	Y	3CCT
GX53	10	800	110	D:73	H:28	0.5	Y	3CCT
GX53	12	960	110	D:73	H:28	0.5	Y	3CCT

Spot Downlight




Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80




Model	Shape	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
Downlight 2"	Round	3	240	60	D:75	H:21	0.5	N	3CCT
Downlight 2.5"	Round	5	400	60	D:89	H:21	0.5	N	3CCT
Downlight 3.5"	Round	7	560	60	D:115	H:25	0.5	N	3CCT
Downlight 4"	Round	10	800	60	D:135	H:26	0.5	N	3CCT
Downlight 2"	Square	3	240	60	D:75	H:21	0.5	N	3CCT
Downlight 2.5"	Square	5	400	60	D:89	H:21	0.5	N	3CCT
Downlight 3.5"	Square	7	560	60	D:115	H:25	0.5	N	3CCT
Downlight 4"	Square	10	800	60	D:135	H:26	0.5	N	3CCT

Flush Mount Panel Light

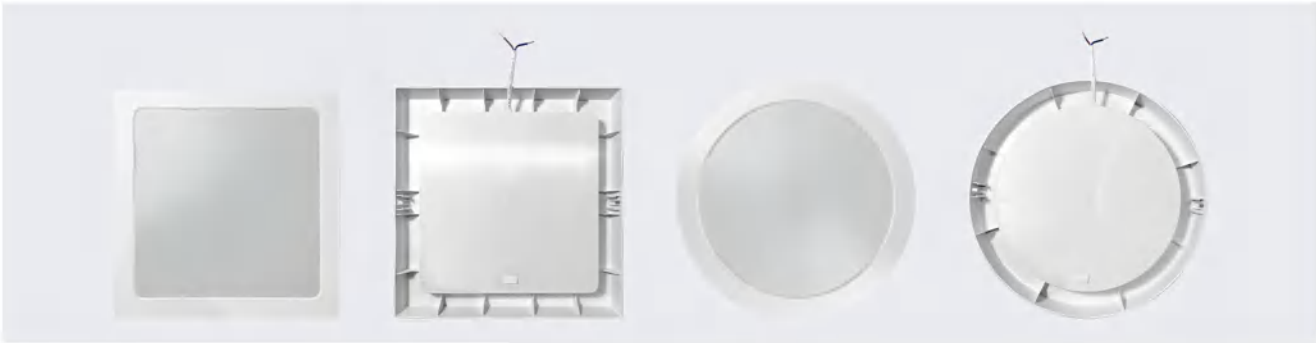

Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80



Model	Shape	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
FDD1009	Round	24	1680	120	D:280	H:30	0.5	N	3CCT
FDDS1009	Square	24	1680	120	D:280	H:30	0.5	N	3CCT

Timing Selectable LED Lamp Serie


Classic A Type



Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 4000K | 6500K

CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Timing
A60	7.5	700	180	D:60	H:112	0.5	N	12H-6H-3H
A60	9	810	180	D:60	H:112	0.5	N	12H-6H-3H
A60	11	1100	180	D:60	H:112	0.5	N	12H-6H-3H
A60	15	1600	180	D:60	H:120	0.5	N	12H-6H-3H