

2025 PRODUCT CATALOG



www.ydj-light.com




Enterprise WeChat

YDJ Light



Smart Lighting

Connect wider and control more Create new life experience!

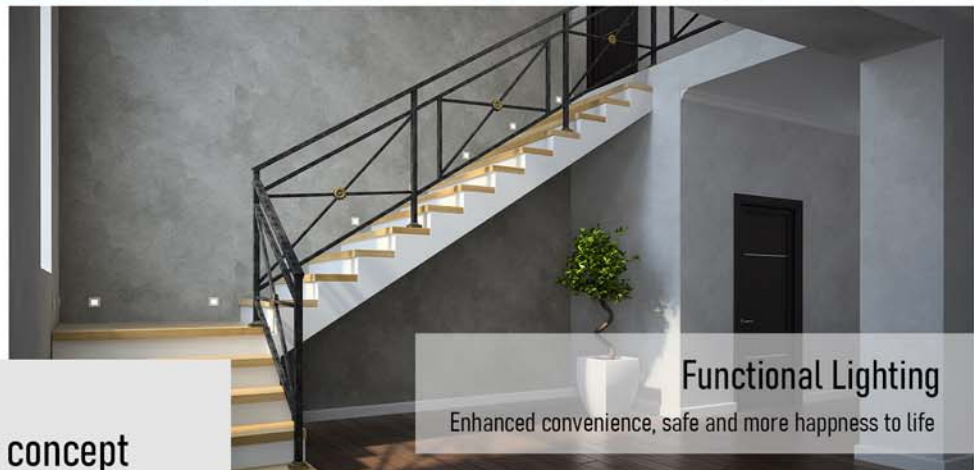

Functional Lighting

Enhanced convenience, safe and more happiness to life

Product design concept

- General lighting is an essential function provided by LED lights. It offers overall illumination for various spaces at home and work. LED lights can adapt to different applications with their flexible shapes and designed light effects.
- Not limited to general lighting, LED light extends to more possibilities with additional function design. Which makes lighting closer to human behaviors, habits, and emotions. Typical scenarios like Color/CCT changing for holidays or ambiances, sensor active for convenience and security. Even to be a good solution as grow light with spectrum design.
- Getting smarter. LED light could be connected to an intelligent system by Wi-Fi/Bluetooth/voice that can be controlled remotely, programmed, or adjusted to different conditions. This brings many benefits of energy saving, convenience, security, and health to our lives and creates more scenarios never experienced before.



General Lighting

All around your life and work

General Lighting\LED Lamps

Classical A bulbs




Voltage: 220-240V DC12V/24V

CCT: 3000K | 4000K | 6500K

CRI: 80

Lamp Base: E27 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
A60	6	560	180	D:60	H:109	0.5/0.7/0.9	N/Y
A60	8	600	180	D:60	H:109	0.5/0.7/0.9	N/Y
A60	10	806	180	D:60	H:109	0.5/0.7/0.9	N/Y
A60	12	1055	180	D:60	H:109	0.5/0.7/0.9	N/Y
A60	15	1521	180	D:60	H:109	0.5/0.7/0.9	N/Y
A60	20	1800	180	D:65	H:132	0.5/0.7/0.9	N/Y
A60	25	2550	180	D:75	H:139	0.5/0.7/0.9	N/Y

Stick bulbs




Voltage: 220-240V | 110-130V | 110-220V

Color/CCT: 2700K | 3000K | 4000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
T4001	7	700	200	D:41	H:114	0.5/0.9	NO
T4001	9	900	200	D:41	H:114	0.5/0.9	NO
T4001	10	1050	200	D:41	H:114	0.5/0.9	NO
T4002	12	1300	200	D:46	H:121	0.5/0.9	NO
T4501	15	1500	200	D:46	H:135	0.5/0.9	NO
T4021	4.9	450	200	D:40	H:91	0.5/0.7	NO
T4021	6	560	200	D:40	H:91	0.5/0.7	NO
T4021	9	806	200	D:40	H:91	0.5/0.7	NO
T4022	12	1050	200	D:46	H:101	0.5/0.7	NO
T4022	15	1300	200	D:46	H:101	0.5/0.7	NO
T4009 pin base	9	900	200	D:41	H:147	0.5	NO
T4009 pin base	10	1050	200	D:41	H:147	0.5	NO
T4009 pin base	12	1250	200	D:41	H:147	0.5	NO

Classical B




Voltage: 220-240V | 110-130V | 110-220V

Color/CCT: 3000K | 4000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | E14 | B22 | B15



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
C37	4	320	230	D:36	H:99	0.5/0.7	N/Y
C37	6	470	230	D:36	H:99	0.5/0.7	N/Y
C37	9	750	230	D:36	H:99	0.5/0.7	N/Y
C37	11	880	230	D:38	H:108	0.5/0.7	N/Y

Mini Globe




Voltage: 220-240V | 110-130V | 110-220V DC12V/24V

Color/CCT: 3000K | 4000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | E14 | B22 | B15




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
P45	4	320	230	D:45	H:79	0.5/0.7	N/Y
P45	6	470	230	D:45	H:79	0.5/0.7	N/Y
P45	9	750	230	D:45	H:79	0.5/0.7	N/Y
P45	11	880	230	D:48	H:99	0.5/0.7	N/Y

General Lighting\LED Lamps

Globe



Voltage: 220-240V | 110-130V | 110-220V
Color/CCT: 3000K | 4000K | 5000K | 6500K
CRI: 80
Lamp Base: E27 | E14 | B22 | B15




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
G95	10	1000	180	D:95	H:139	0.5/0.9	N/Y
G120	15	1500	180	D:120	H:160	0.5/0.9	N/Y
G120	20	2000	180	D:120	H:160	0.5/0.9	N/Y
G120	25	2500	180	D:120	H:160	0.5/0.9	N/Y

Disk light



Voltage: 220-240V | 110-130V | 110-220V
Color/CCT: 3000K | 4000K | 5000K | 6500K
CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-FD0501-D120D-12	12	1300	120	D:130	H:81	0.5	NO
L-FD0601-D120D-24	24	2400	120	D:160	H:101	0.5/0.7	NO
L-FD0801-D120W-36	36	3600	120	D:190	H:122	0.7	NO
L-FD1001-D120D-50	50	3600	120	D:252	H:129	0.7	NO

GU10 Spot lamps



Voltage: 220-240V | 110-130V | 110-220V
 Color/CCT: 2700K | 3000K | 4000K | 6500K
 CRI: 80




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
GU10	4	320	40/120	D:49	H:54	0.5/0.7	N/Y
GU10	6	470	40/120	D:49	H:54	0.5/0.7	N/Y
GU10	8	640	40/120	D:50	H:55	0.5/0.7	N/Y
GU10	10	800	40/120	D:50	H:55	0.5/0.7	N/Y

Transparent Spot Lamps



Voltage: 220-240V | 110-130V | 110-220V
 Color/CCT: 2700K | 3000K | 4000K | 6500K
 CRI: 80

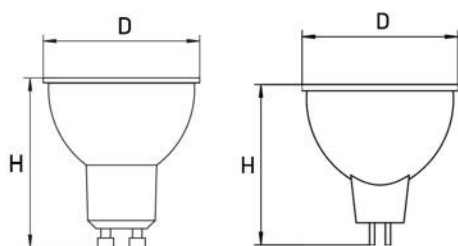

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
MR16	3	300	38	D:49	H:47	0.5	N
GU10	3	300	38	D:49	H:56	0.5	N

General Lighting\LED Lamps

PAR lamps




Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 4000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
PAR20	7	525	40/60	D:63	H:86	0.5/0.7	N/Y
PAR30	11	900	40/60	D:95	H:113	0.5/0.7	N/Y
PAR38	14	1000	40/60	D:120	H:132	0.5/0.7	N/Y

BR lamps




Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 4000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
R20	6	320	100	D:63	H:95	0.5/0.7	N/Y
BR30	8	470	100	D:92	H:125	0.5/0.7	N/Y
BR40	17	640	100	D:122	H:156	0.5/0.7	N/Y
R39	4	320	100	D:39	H:69	0.5	N
R50	6	470	100	D:50	H:86	0.5	N
R63	8	640	100	D:63	H:100	0.5	N
R80	9	800	100	D:80	H:113	0.5	N


High-Watt A type



Voltage: 110-220V/220-240V/220-240V DC12V/24V

Color/CCT: 3000K/6500K

CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
A80	18	1800	180	D:80	H:143	0.5/0.7	N/Y
A95	20	1800	180	D:85	H:188	0.5	N/Y
A120	30	2700	180	D:120	H:216	0.5/0.7	N

High-Watt T type




Voltage: 220-240V | 110-130V | 110-220V

Color/CCT: 3000K | 4000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | E40




Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
T70S	20	1600	180	D:70	H:104	0.5/0.9	N
T80S	30	2400	180	D:80	H:114	0.5/0.9	N
T100S	40	3200	180	D:100	H:148	0.5/0.9	N
T120S	50	4000	180	D:118	H:169	0.5/0.9	N
T70	20	1600	180	D:70	H:127	0.5/0.9	N
T80	30	2400	180	D:80	H:148	0.5/0.9	N
T100	40	3200	180	D:100	H:178	0.5/0.9	N
T120	50	4000	180	D:118	H:210	0.5/0.9	N
T140	65	5200	180	D:138	H:270	0.5/0.9	N
T140M	75	6000	180	D:138	H:238	0.5/0.9	N
T140M	85	6800	180	D:138	H:238	0.5/0.9	N
T160	100	8000	180	D:160	H:275	0.5/0.9	N

General Lighting\LED Lamps

High-Watt NL type



Voltage: 220-240V | 110-130V | 110-220V
Color/CCT: 3000K | 4000K | 5000K | 6500K
CRI: 80
Lamp Base: E27 | E40



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
HL145	65	5600	180	D:145	H:218	0.5/0.9	N
HL170	80	7200	180	D:170	H:226	0.5/0.9	N
HL189	100	9000	180	D:189	H:265	0.5/0.9	N
HL236	150	13500	180	D:236	H:277	0.5/0.9	N



PAR lamps




Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 4000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
PAR20	7	525	40/60	D:63	H:86	0.5/0.7	N/Y
PAR30	11	900	40/60	D:95	H:113	0.5/0.7	N/Y
PAR38	14	1000	40/60	D:120	H:132	0.5/0.7	N/Y

BR lamps




Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 4000K | 6500K

CRI: 80

Lamp Base: E27 | E26 | B22



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
R20	6	320	100	D:63	H:95	0.5/0.7	N/Y
BR30	8	470	100	D:92	H:125	0.5/0.7	N/Y
BR40	17	640	100	D:122	H:156	0.5/0.7	N/Y
R39	4	320	100	D:39	H:69	0.5	N
R50	6	470	100	D:50	H:86	0.5	N
R63	8	640	100	D:63	H:100	0.5	N
R80	9	800	100	D:80	H:113	0.5	N

General Lighting\LED Lamps

Deformable LED Low Bay Light




Color/CCT: 3000K/4000K/6500K


Volt: 127-240V/50/60HZ

CRI: 80

Lamp Base: E27

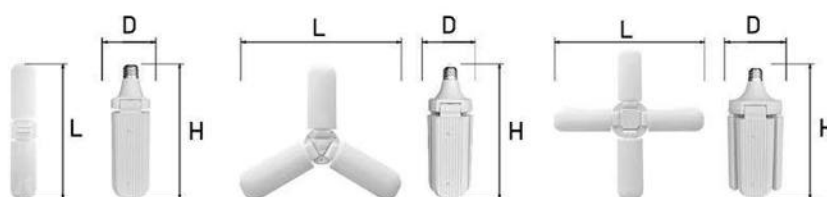

	Model	Watt	Rated Lumen	Beam Angle	Lamp dimension MOD*MOL*open MOL			Power Factor	Dimmable	Panel
	L-YZ2001-D120-12	12	3200	120	D:83	L:352	H:233	>0.5	NO	2
	L-YZ3001-D120-24	24	2200	120	D:90	L:300	H:240	>0.5	NO	3
	L-YZ4001-D120-32	32	2800	120	D:90	L:400	H:240	>0.5	NO	4

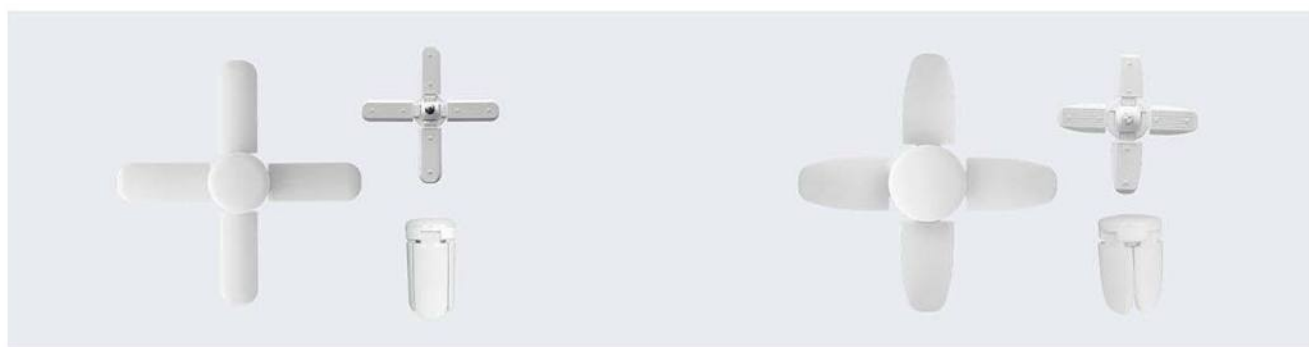


Color/CCT: 6500K

Volt: 127-240V/50/60HZ/NEMC

CRI: 80

Lamp Base: E27

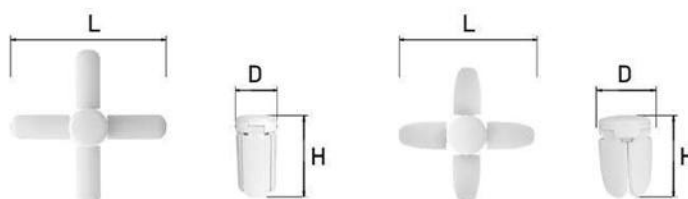


Model	Watt	Rated Lumen	Beam Angle	Lamp dimension MOD*MOL*open MOL			Power Factor	Dimmable	Panel
L-YZ41001-D120-40	40	3200	120	D:104	L:400	H:197	>0.5	NO	4+1
L-YZ41002-D120-40	40	3200	120	D:114	L:345	H:170	>0.5	NO	4+1

Deformable LED Low Bay Light




Color/CCT: 3000K/4000K/6500K
Volt: 127-240V/50/60HZ
CRI: 80
Lamp Base: GX53

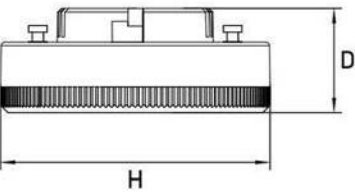

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-GX5316-D120-10	10	800	100-120	D:28	H:73	>0.5	NO
L-GX5316-D120-12	12	960	100-120	D:28	H:73	>0.5	NO
L-GX5316-D120-08	8	640	100-120	D:28	H:73	>0.5	NO
L-GX5317-D120-06	6	480	100-120	D:26	H:73	>0.5	NO



Color/CCT: 6500K
Volt: 127-240V/50/60HZ/NEMC
CRI: 80
Lamp Base: GX70



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-GX7001-D120W-20	20	1600	100-120	D:43	H:110	>0.5	NO