

2025 PRODUCT CATALOG



www.ydj-light.com



Enterprise WeChat

YDJ Light

General Lighting\LED Luminaires


Spot Downlight



Color/CCT:3000K/4000K/6500K

Volt: 110-130/220-240/110-220V

CRI: 80

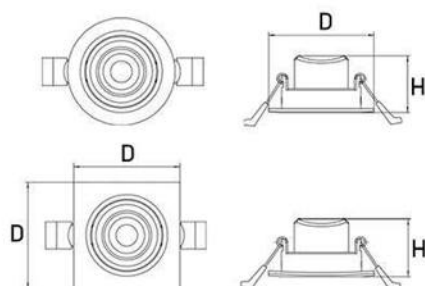

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)
L-LRDCR20N01-D38W-03	3	240	40	D:74	H:39	0.5	N	φ60
L-LRDCR25N04-D38W-05	5	400	40	D:95	H:40	0.5	N	φ70
L-LRDCR35N01-D38W-07	7	560	40	D:117	H:53	0.5	N	φ90
L-LRDCR40N01-D38W-12	12	960	40	D:140	H:55	0.5	N	φ120
L-LRFCR20N01-D38W-03	3	240	40	D:74	H:39	0.5	N	φ60
L-LRFCR25N04-D38W-05	5	400	40	D:95	H:40	0.5	N	φ70
L-LRFCR35N01-D38W-07	7	560	40	D:117	H:53	0.5	N	φ90
L-LRFCR40N01-D38W-12	12	960	40	D:140	H:55	0.5	N	φ120


Recessed Downlight



Color/CCT: 3000K/4000K/6500K


Volt: 110-130/220-240/110-220V

CRI: 80

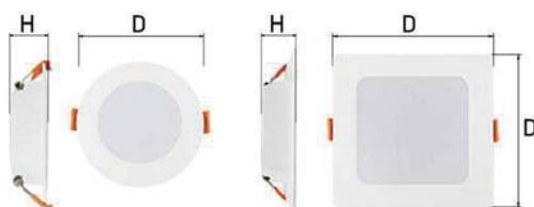


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)
L-RDD3003P-D120D-03	3	120	120	D:89.5	H:23	>0.5	NO	φ75
L-RDD4003P-D120D-06	6	420	120	D:111	H:23	>0.5	NO	φ95
L-RDD5003P-D120D-09	9	630	120	D:143	H:24	>0.5	NO	φ125
L-RDD6003P-D120D-15	15	1050	120	D:168	H:25	>0.5	NO	φ150
L-RDD8003PE-D120D-20	20	2000	120	D:214	H:26	>0.5	NO	φ190
L-RDDS4001-D120D-06	6	420	120	D:110	H:25	>0.5	NO	95*95
L-RDDS5001-D120D-09	9	630	120	D:140	H:25	>0.5	NO	125*125
L-RDDS6001-D120D-15	15	1050	120	D:165	H:28	>0.5	NO	150*150
L-RDDS8001-D120D-20	20	1400	120	D:210	H:28	>0.5	NO	190*190

Slim Spot Downlight

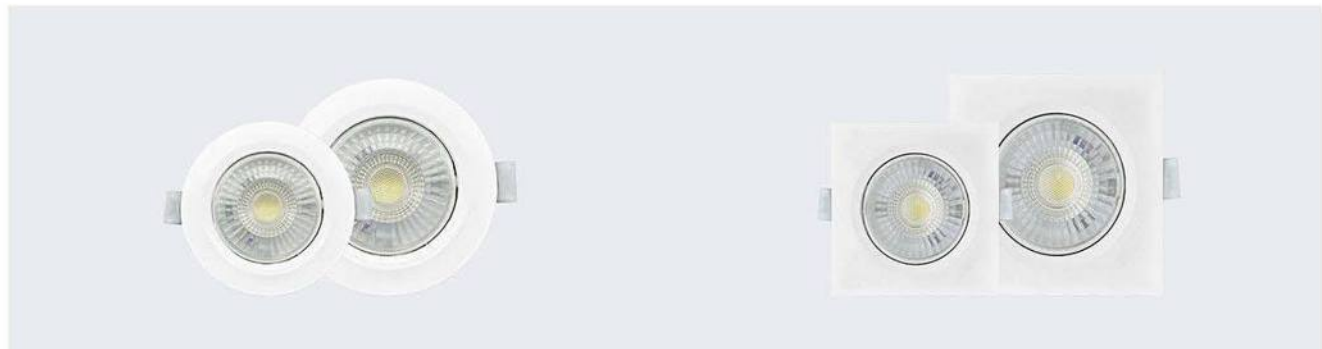


Color/CCT: 3000K/4000K/6500K
Volt: 110-130/220-240/110-220V
CRI: 80

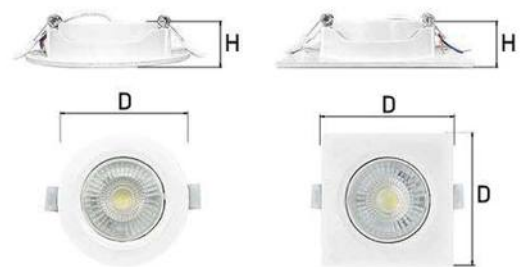


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)
L-LRDCR20N01-D38W-03	3	240	40	D:74	H:19	0.5	N	φ60
L-LRDCR25N04-D38W-05	5	400	40	D:95	H:19	0.5	N	φ70
L-LRFCR20N01-D38W-03	3	240	40	D:74	H:19	0.5	N	φ60
L-LRFCR25N04-D38W-05	5	400	40	D:95	H:19	0.5	N	φ70

Flush Mount Downlight

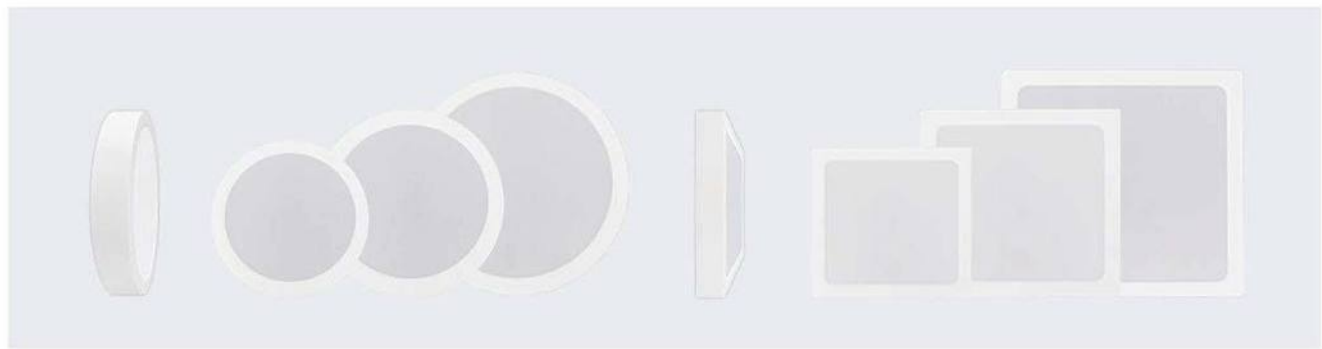

Color/CCT: 3000K/4000K/6500K
Volt: 110-130/220-240/110-220V
CRI: 80

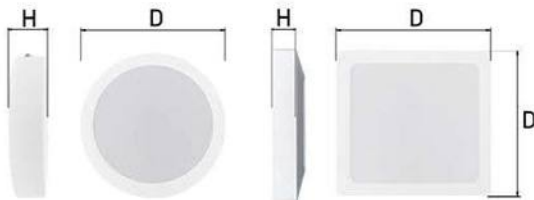

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-FDD5001-D120D-10	10	700	120	D:143	H:28	>0.5	NO
L-FDD6001-D120D-15	15	1050	120	D:169	H:29	>0.5	NO
L-FDD8001-D120D-20	20	1400	120	D:214	H:30	>0.5	NO
L-FDDS5001-D120D-10	10	700	120	D:139	H:29	>0.5	NO
L-FDDS6001-D120D-15	15	1050	120	D:164	H:31	>0.5	NO
L-FDDS8001-D120D-20	20	1400	120	D:209	H:32	>0.5	NO

General Lighting\LED Luminaires


Ceiling Backlit Panels



Color/CCT: 3000K/4000K/6500K

Volt: 110-220V/50/60HZ

CRI: 80

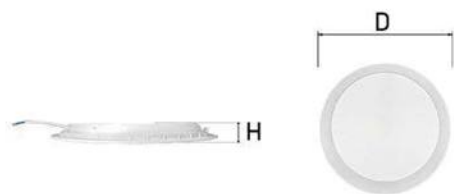


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)	Material
L-RDD4003P-D120D-06	6	420	120	D:119	H:20.5	>0.5	NO	φ100	plastic+iron
L-RDD6003P-D120D-12	12	840	120	D:168	H:20.5	>0.5	NO	φ147	plastic+iron
L-RDD8005P-D120D-18	18	1260	120	D:223	H:20.5	>0.5	NO	φ197	plastic+iron
L-RDD10001-D120D-24	24	1680	120	D:297	H:20.5	>0.5	NO	φ273	plastic+iron



Color/CCT: 3000K/4000K/6500K

Volt: 110-220V/50/60HZ

CRI: 80

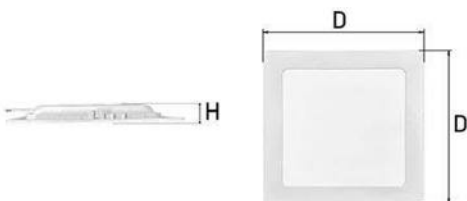


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)	Material
L- RDDS4001-D120D-06	6	420	120	D:117	H:20.5	>0.5	NO	100*100	plastic+iron
L-RDDS6001-D120D-12	12	840	120	D:167	H:20.5	>0.5	NO	147*147	plastic+iron
L-RDDS8001-D120D-18	18	1260	120	D:218	H:20.5	>0.5	NO	197*197	plastic+iron
L-RDDS10001-D120D-24	24	1680	120	D:291	H:20.5	>0.5	NO	273*273	plastic+iron


Ceiling Backlit Panels




Color/CCT: 3000K/4000K/6500K
Volt: 110-220V/50/60HZ
CRI: 80

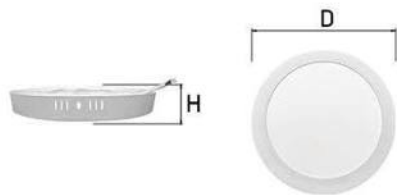

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)	Material
L-FDD5001-D120D-6	6	420	120	D:117	H:25	>0.5	NO	/	plastic+iron
L-FDD6001-D120D-12	12	800	120	D:169	H:25	>0.5	NO	/	plastic+iron
L-FDD8001-D120D-18	18	1100	120	D:219	H:25	>0.5	NO	/	plastic+iron
L-FDD10001-D120D-24	24	1680	120	D:294	H:25	>0.5	NO	/	plastic+iron

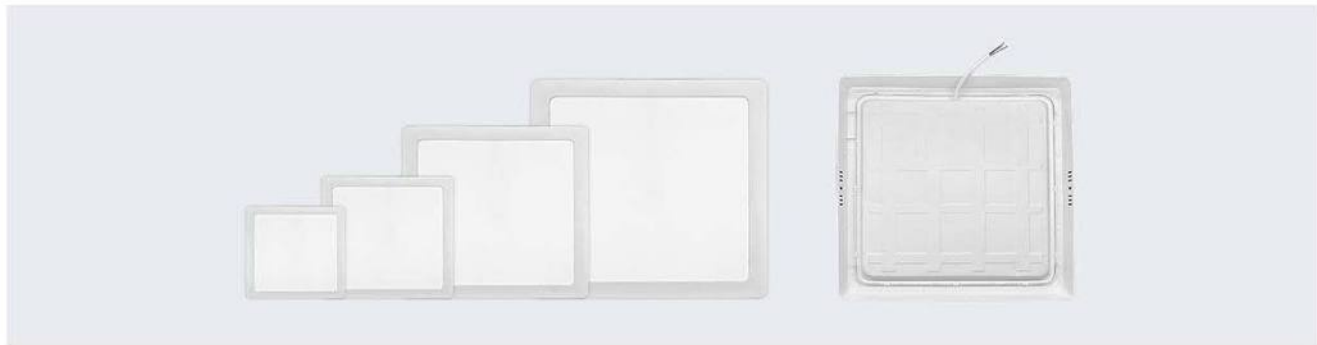

Color/CCT: 3000K/4000K/6500K
Volt: 110-220V/50/60HZ
CRI: 80

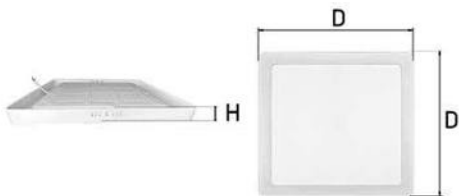

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	opening (mm)	Material
L-FDD55001-D120D-6	6	420	120	D:116	H:25	>0.5	NO	/	plastic+iron
L-FDD6001-D120D-12	12	800	120	D:168	H:25	>0.5	NO	/	plastic+iron
L-FDD8001-D120D-18	18	1100	120	D:218	H:25	>0.5	NO	/	plastic+iron
L-FDD10001-D120D-24	24	1680	120	D:294	H:25	>0.5	NO	/	plastic+iron

General Lighting\LED Luminaires

Flush Mount Frameless Downlight



Color/CCT: 3000K/4000K/6500K


Volt: 110-130/220-240/110-220V

CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-FDDS4004FLPE-D120D-18	18	1710	180	D:120	H:40	0.5	NO
L-FDD4004FLPE-D120D-18	18	1710	180	D:120	H:40	0.5	NO
L-FDDS6004FLPE-D120D-24	24	2280	180	D:170	H:40	0.5	NO
L-FDD6004FLPE-D120D-24	24	2280	180	D:170	H:40	0.5	NO
L-FDDS8004FLPE-D120D-36	36	3420	180	D:225	H:40	0.5	NO
L-FDD8004FLPE-D120D-36	36	3420	180	D:225	H:40	0.5	NO

Retrofit Recessed Downlight kits

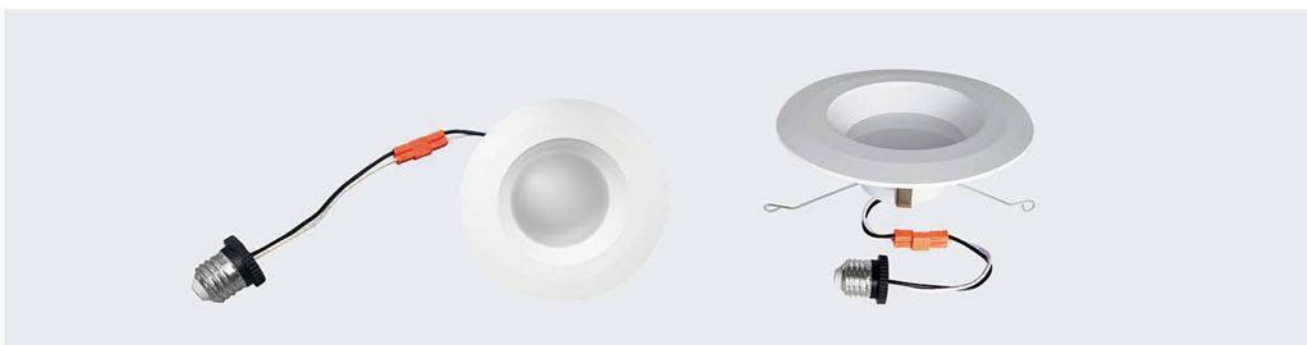


Color/CCT: 2700K/3000K/5000K

Volt: 120V

CRI: 80/90

ETL certificated

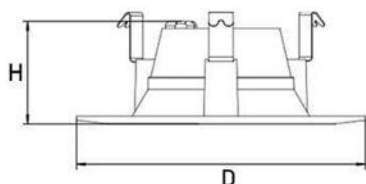

Model	Watt	Rated Lumen	Dimension (mm)		Power Factor	Dimmable
L-RDT40D20-D120D-10	10	600	D:130	H:47	0.7	YES
L-RDT60D20-D120D-11	11	750	D:190	H:60	0.7	YES


Bulkhead Oval



Color/CCT: 3000K/4000K/6500K

Volt: 110-130/220-240/110-220V

CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Lifespan (hrs)	Dimension (mm)			IP Class	Dimmable
L-BHO18-D120D-8	8	750	120	15000	D:158	L:85	H:39	IP54/IP65	N
L-BHO19-D120D-12	12	1100	120	15000	D:193	L:94	H:39	IP54/IP65	N
BHO03-D120D-5	5	480	120	15000	D:178	L:86	H:57	IP54/IP65	N
L-BHO05-D120D-8	8	640	120	15000	D:159	L:89	H:46	IP54/IP65	N
L-BHO04-D120D-12	12	1100	120	15000	D:200	L:97	H:56	IP54/IP65	N
BHO06-D120D-18	18	1700	120	15000	D:198	L:97	H:46	IP54/IP65	N


Bulkhead Round/Ceiling Light



Color/CCT: 3000K/4000K/6500K

Volt: 110-130/220-240/110-220V

CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Lifespan (hrs)	Dimension (mm)		IP Class	Dimmable
L-BHR18-D120D-8	8	750	120	15000	D:151	H:40	IP54/IP65	N
L-BHR19-D120D-12	12	1100	120	15000	D:173	H:40	IP54/IP65	N
L-BHR05-D120D-8	8	640	120	15000	D:155	H:48	IP54/IP65	N
L-BHR06-D120D-12	12	960	120	15000	D:175	H:48	IP54/IP65	N
L-BHR07-D120D-18	18	1440	120	15000	D:205	H:48	IP54/IP65	N

General Lighting\LED Luminaires


Panel Light/Backlit



Color/CCT: 3000K/4000K/6500K

Volt: 110-130/220-240/110-220V

CRI: 80

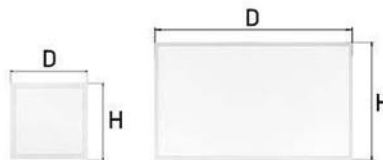

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-P404001-D120W-32	32	2880	120	D:400	H:400	>0.9	NO	L-P626202-D120D-40	40	3600	120	D:620	H:620	>0.9	NO
L-P404002-D120W-32	32	2880	120	D:400	H:400	>0.9	NO	L-P606005-D120D-45	45	4000	120	D:595	H:595	>0.9	NO
L-P404001-D120D-32	32	2880	120	D:400	H:400	>0.9	NO	L-P606005-D120D-45	45	3500	120	D:595	H:595	>0.9	NO
L-P404002-D120D-32	32	2880	120	D:400	H:400	>0.9	NO	L-P1203001-D120D-45	45	3800	120	D:1195	H:295	>0.9	NO
L-P626201-D120W-40	40	3600	120	D:620	H:620	>0.9	NO	L-P1203001-D120D-45	45	4000	120	D:1195	H:295	>0.9	NO
L-P626202-D120W-40	40	3600	120	D:620	H:620	>0.9	NO	L-P1206002-D120D-65	65	5800	120	D:1195	H:595	>0.9	NO
L-P626201-D120D-40	40	3600	120	D:620	H:620	>0.9	NO	L-P1206002-D120D-65	65	6500	120	D:1195	H:595	>0.9	NO


Batten Light



Color/CCT: 3000K/4000K/6500K

Volt: 110-130/220-240/110-220V

CRI: 80

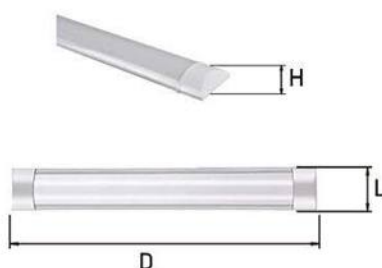

Model	Watt	Rated Lumen	Beam Angle	Power Factor	Dimension (mm)			IP Rate	Dimmable
L-L60075-D120D-18	18	1600	120	0.85	D:600	L:75	H:25	IP20	NO
L-LP120075-D120D-36	36	3200	120	0.85	D:600	L:75	H:25	IP20	NO
L-LP60075-D120D-18	18	1600	120	0.85	D:1200	L:75	H:25	IP20	NO
L-LP120075-D120D-36	36	3200	120	0.85	D:1200	L:75	H:25	IP20	NO
L-LP60075-D120D-18	18	1350	120	0.5	D:600	L:75	H:25	IP20	NO
L-LP120075-D120D-36	36	2700	120	0.5	D:1200	L:75	H:25	IP20	NO
L-LP150075-D120D-45	45	4050	120	0.5	D:1500	L:75	H:25	IP20	NO
L-LP600116-D120D-18	18	1440	120	0.5	D:600	L:116	H:35	IP20	NO
L-LP1200116-D120D-36	36	2880	120	0.5	D:1200	L:116	H:35	IP20	NO

Wall Light



Color/CCT: 3000K/6500K
Volt: 110-130/220-240/110-220V
CRI: 80



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)			Power Factor	Dimmable
L-WL1202W-D125W-4	4	200	10-125 adjustable	D:119	L:52	H:120	0.5/0.7	N
L-WL1201B-D125W-4	4	200	10-125 adjustable	D:119	L:52	H:120	0.5/0.7	N



General Lighting\LED Luminaires


SlimPanel Edgelite Downlight



Color/CCT: 2700/3000/3500/4000/5000K

Volt: 120V/60Hz/EMC

CRI: 80

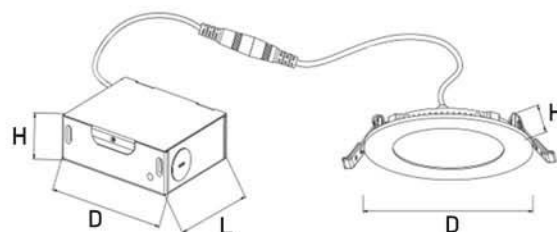

Model	Watt	Rated Lumen	Color/Red	Beam Angle	Dimension (mm)		Driver Dimension(mm)			Power Factor	Dimmable
L-SPRT4012-D120W-10	10	1000	2700/3000/3500/4000/5000K	120	D:174	H:24	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch
L-SPRT6012-D120W-12	12	700	2700/3000/3500/4000/5000K	120	D:22	H:21	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch


Slim Panel Backlite Downlight



Color/CCT: 2700/3000/3500/4000/5000K

Volt: 120V/60Hz/EMC

CRI: 80

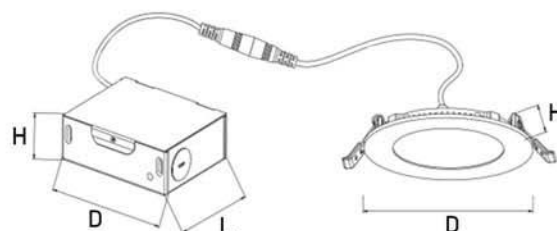


Model	Watt	Rated Lumen	Color/Red	Beam Angle	Dimension (mm)		Driver Dimension(mm)			Power Factor	Dimmable
L-SPRT4013-D120W-10	10	1000	2700/3000/3500/4000/5000K	120	D:174	H:30	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch
L-SPRT6013-D120W-12	12	700	2700/3000/3500/4000/5000K	120	D:125	H:40	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch

General Lighting\LED Luminaires

Gimbal Downlight



Color/CCT: 2700/3000/3500/4000/5000K
Volt: 120V/60Hz/EMC
CRI: 80

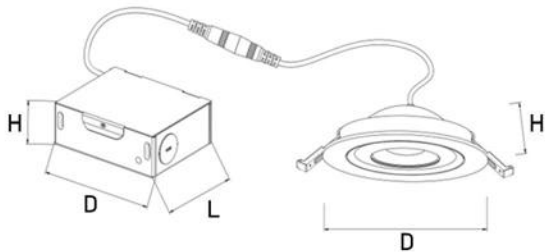

Model	Watt	Rated Lumen	Color/Red	Beam Angle	Dimension (mm)		Driver Dimension(mm)			Power Factor	Dimmable
L-SPRT4014-D40W-10	10	650	2700/3000/3500 /4000/5000K	40	D:122	H:21	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch
L-SPRT4015-D40W-10	10	650	2700/3000/3500 /4000/5000K	40	D:124	H:26	D:95	L:73	H:30	> 0.5	Y+5CCT DIP Switch+Wall Switch

LED Track Light Head




Model	Color	Material	Description	Dimension(mm)
L-TL1HGX53B01	black or white	aluminum+metal	1 light on plate, GX53 lampholder, without bulb	L120*W85*H120
L-TL1HGU10BWG01	black with wood grain	aluminum+metal	1 light on plate, GU10 lampholder, without bulb	L80*W120*H155
L-TL3HGU10BG01	black and gold	aluminum+metal	3 lights on bar, 3xGU10 lampholder, without bulb	L460*W60*H125
L-TL1HGU10B02	black or white	metal+plastic	1 light on plate, GU10 lampholder, without bulb	L80*W90*H145
L-TL2HGU10B02	black or white	metal+plastic	2 lights on bar, 2xGU10 lampholder, without bulb	L300*W90*H150
L-TL3HGU10B02	black or white	metal+plastic	3 lights on bar, 3xGU10 lampholder, without bulb	L460*W90*H150

LED Track Light




Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80

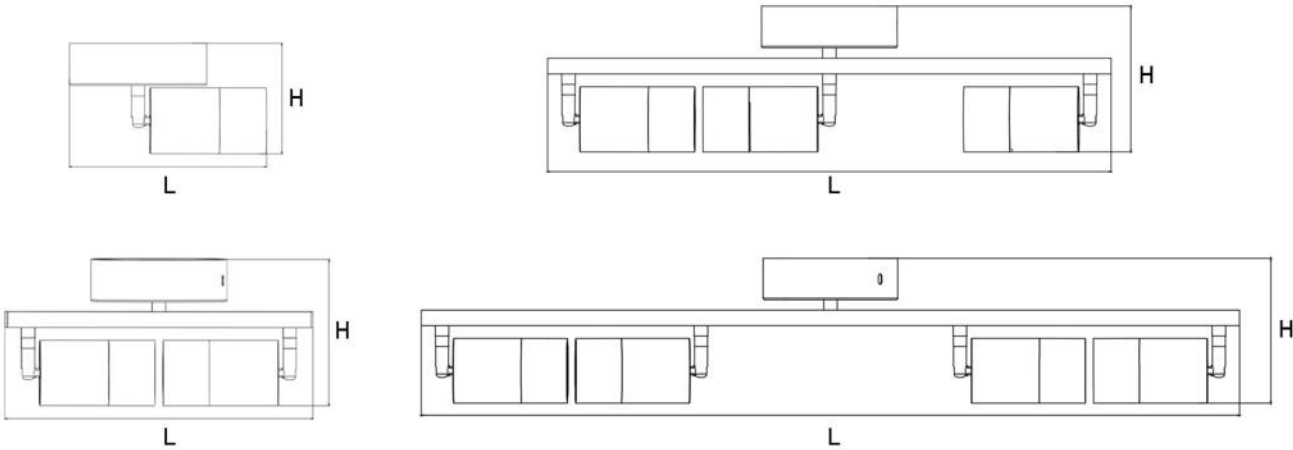

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	CCT
L-LRTL1H-D38WD-4	4	350	38	L:187	H:105	0.5	Y	5 CCT
L-LRTL2H-D38WD-8	8	700	38	L:294	H:140	0.5	Y	5 CCT
L-LRTL3H-D38WD-12	12	1050	38	L:540	H:140	0.5	Y	5 CCT
L-LRTL4H-D38WD-16	16	1400	38	L:790	H:140	0.5	Y	5 CCT
L-LRTL1H-D38D-6	6	450	38	L:187	H:105	0.5	N	1 CCT
L-LRTL2H-D38D-12	12	900	38	L:294	H:140	0.5	N	1 CCT
L-LRTL3H-D38D-18	18	1350	38	L:540	H:140	0.5	N	1 CCT
L-LRTL4H-D38D-24	24	1800	38	L:790	H:140	0.5	N	1 CCT

General Lighting\LED Luminaries

Track Light Kit





Model	Color	Material	Description	Dimension (mm)
L-TLHGX53	black or white	plastic+metal	GX53 lampholder, without bulb	D80*H88
L-TLHGU10	black or white	plastic+metal	GU10 lampholder, without bulb	D60*H118

New Product Night Light



LED Night Light

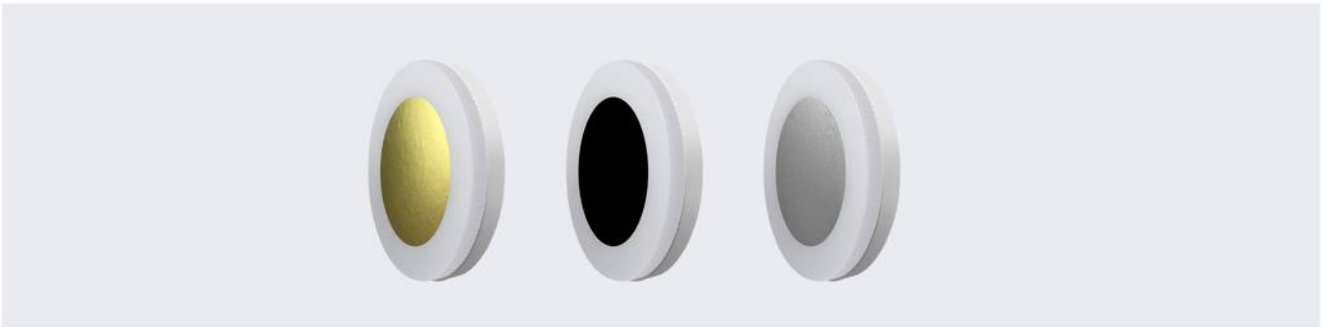

Voltage: 220-240V | 110-130V | 110-220V
CCT: 3000K | 4000K | 6500K
CRI: 80

Model	Color	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Dusk to Dawn
LNLGX5330	Black/Golden/Silver	1	30-60-100	110	D:74.5	H:39	0.5	Y	Light Sensor

Photo								
Model	MA211	MA212	MA204	MA401	MA402	MA501	MA601	MA602
Color	3000K/4000K /6500K	3000K/4000K /6500K	3000K/4000K /6500K	3000K/4000K /6500K	3000K/4000K /6500K	4000K/6500K	3000K/6500K	4000K/6500K
Parameter	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 0.8w	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 0.8w	DC5V/0.6W 350mah	DC5V/0.6W 700mah
Control Type	光控 Light Sensor	调光 Dimming	光控 Light Sensor	光控 Light Sensor	光控 Light Sensor	人体感应 Body Respo	人体感应 Body Respo	人体感应 Body Respo
QTY	120	120	120	120	120	120	50	50

Photo								
Model	ma404	ma405	ma406	MA301	MA302	MA303	MA304	MA207
Color	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Parameter	AC110/220V 50/60hz 0.2w	AC110/220V 50/60hz 0.2w	AC110/220V 50/60hz 0.2w	AC110/220V 50/60hz 0.8w	AC110/220V 50/60hz 0.8w	AC110/220V 50/60hz 0.8w	AC110/220V 50/60hz 0.8w	110/220V 50/60hz 0.8w
Control Type	光控/开关 light sensor switch	光控/开关 light sensor switch	光控/开关 light sensor switch	光控 Light Sensor	光控 Light Sensor	光控 Light Sensor	光控 Light Sensor	开关 Switch
QTY	120	120	120	120	120	120	120	120

Photo					
Model	MA208	MA209	MA210	MA201	MA202
Color	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Parameter	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 0.2w	AC110/220V 50/60hz 0.8w	AC110/220V 50/60hz 0.5w	AC110/220V 50/60hz 1w
Control Type	开关 Switch	无 N	开关 Switch	开关 Switch	开关 Switch
QTY	120	120	120	120	120

