

YDJ Light

Grow Light



Feature:

- High PPFE
- Spectrum Design as requested
- More choice of housing for applications



www.ydj-light.com





www.ydj-lighting.com



Enterprise WeChat

Fujian YDJ Light Co., Ltd.
e-mail: marketing@ydj-light.com
Fuzhou-China

Grow Light

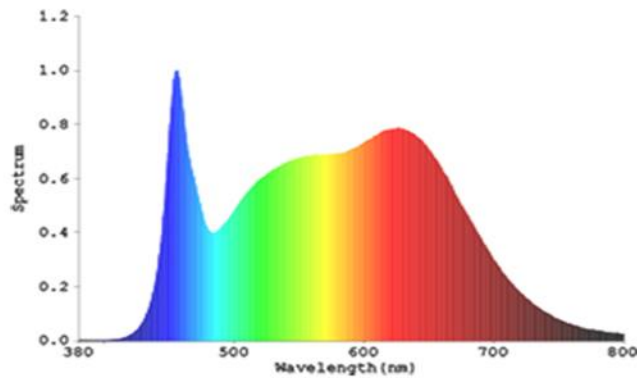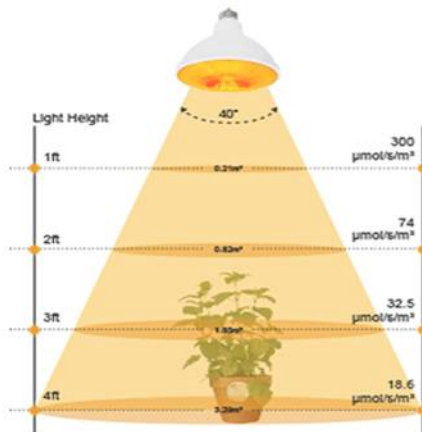

We offer customizable lighting solutions and equipment for various plant and animal growth requirements for our clients. By understanding the specific needs of different plant or animal species, we can tailor the light spectrum and design appropriate fixtures to optimize their growth and well-being. Our customized lighting systems not only promote healthy growth but also contribute to energy efficiency and sustainability.

Voltage: 220-240V | 110-130V | 110-220V

CCT: 3000K | 5000K | 6500K

CRI: 80

Lamp Base: E27 | B22

Spectrum: Full spectrum

Colors: Red /Blue


Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-A60109-D180-09	9	680	180	D:60	H:109	0.5	N
L-BR3005-D100-15	15	1350	100	D:92	H:129	0.5	N
L-PAR3014-D40-09	9	560	40	D:95	H:110	0.5	N
PAR38	14	1000	40/60	D:120	H:132	0.5/0.7	N/Y
LG-Q3030-D120-DRBW-50	50	6500	120	D:300	H:300	0.9	N
LG-Q4040-D120-DRB-90	90	3000	120	D:400	H:400	0.9	N

Feature:

- High PPFE
- Spectrum Design as requested
- More choice of housing for applications


Grow Light

A Bulbs



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
A60	10	900	180	D:60	H:109	0.5	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
A60	12	1200	180	D:60	H:109	0.5	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)


BR Lamps



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
BR30	10	900	120	D:92	H:129	0.5	Y	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
BR40	15	1350	120	D:122	H:159	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

PAR Lamps



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
PAR20	6	375	40	D:63	H:85	0.5	N	DR+B/DR+B+Full Spectrum	Clear lens	Dim/non-dim/Remote/External switch (on-off/time/levels)
PAR30	9	560	40	D:95	H:110	0.5	N	DR+B/DR+B+Full Spectrum	Clear lens	Dim/non-dim/Remote/External switch (on-off/time/levels)
PAR38	30	2680	100	D:122	H:137	0.5	N	DR+B/DR+B+Full Spectrum	Clear lens	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

YDJ Spotlight Grow Light – Precision Growth for Every Plant





Targeted Growth, Enhanced Flourishing

- Focused Light:** Direct a powerful beam of full-spectrum light exactly where your plants need it most, encouraging stronger, more vigorous growth.
- Compact and Efficient:** Our spotlight design is compact yet powerful, making it ideal for concentrating light on specific areas without wasting energy.
- Versatile Fixtures:** Easily install our grow light with a variety of fixtures to suit your space and plant arrangements – from hanging brackets to freestanding mounts.
- Easy Installation:** Designed for simplicity, our grow light fits into a wide range of standard sockets for hassle-free setup.





Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-GU1056-D110-3.5	3.5	40	110	D:50	H:50	>0.4	NO

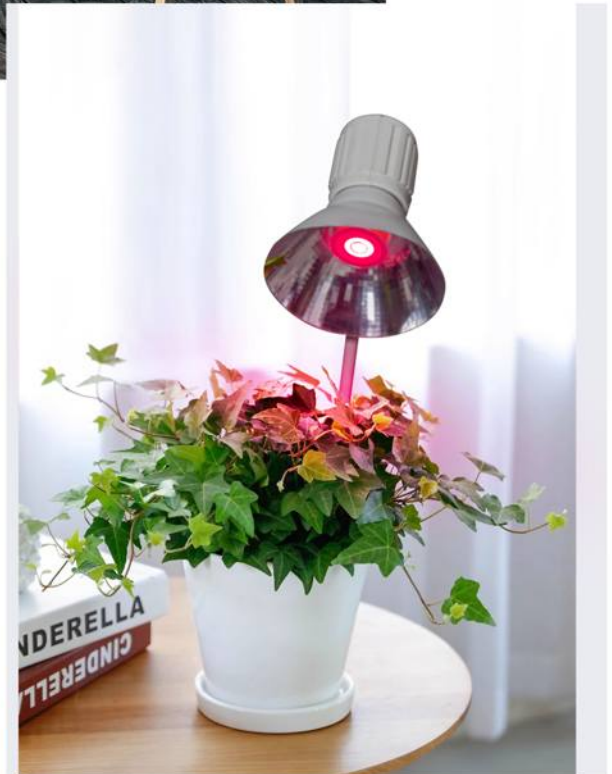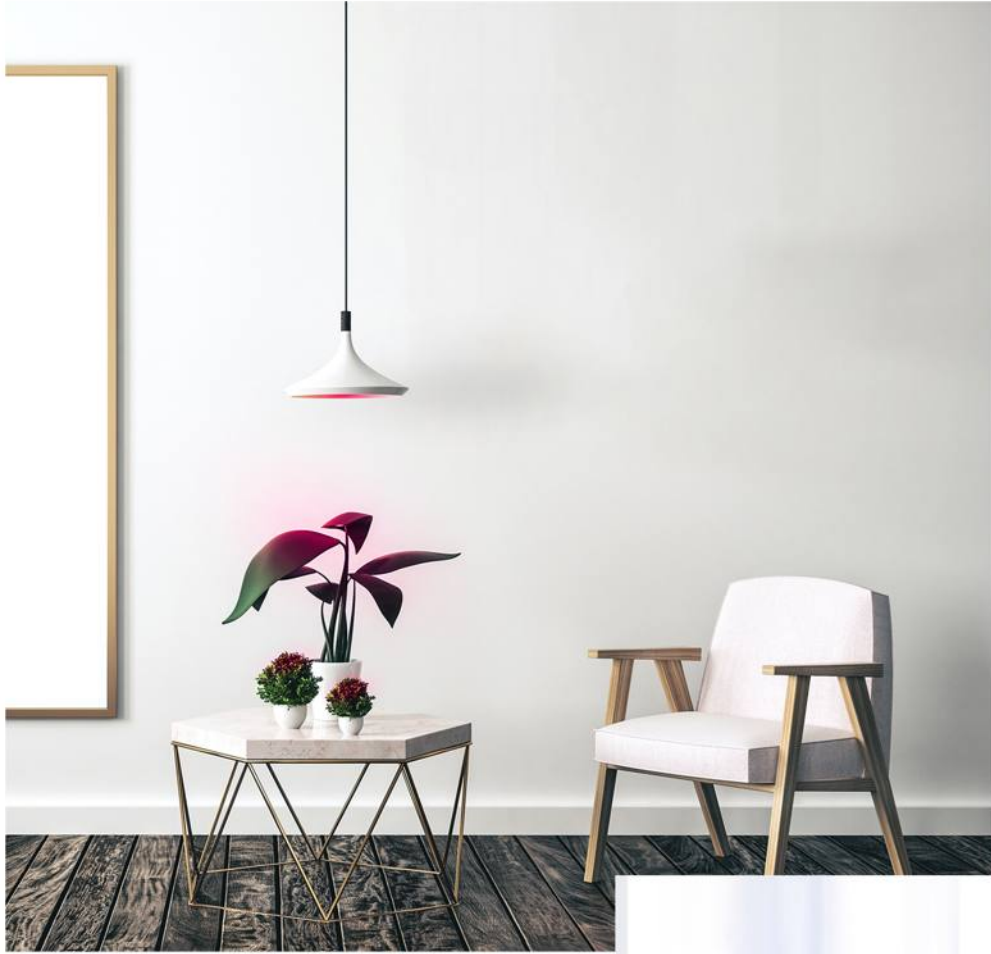

Grow Light


Disk Light

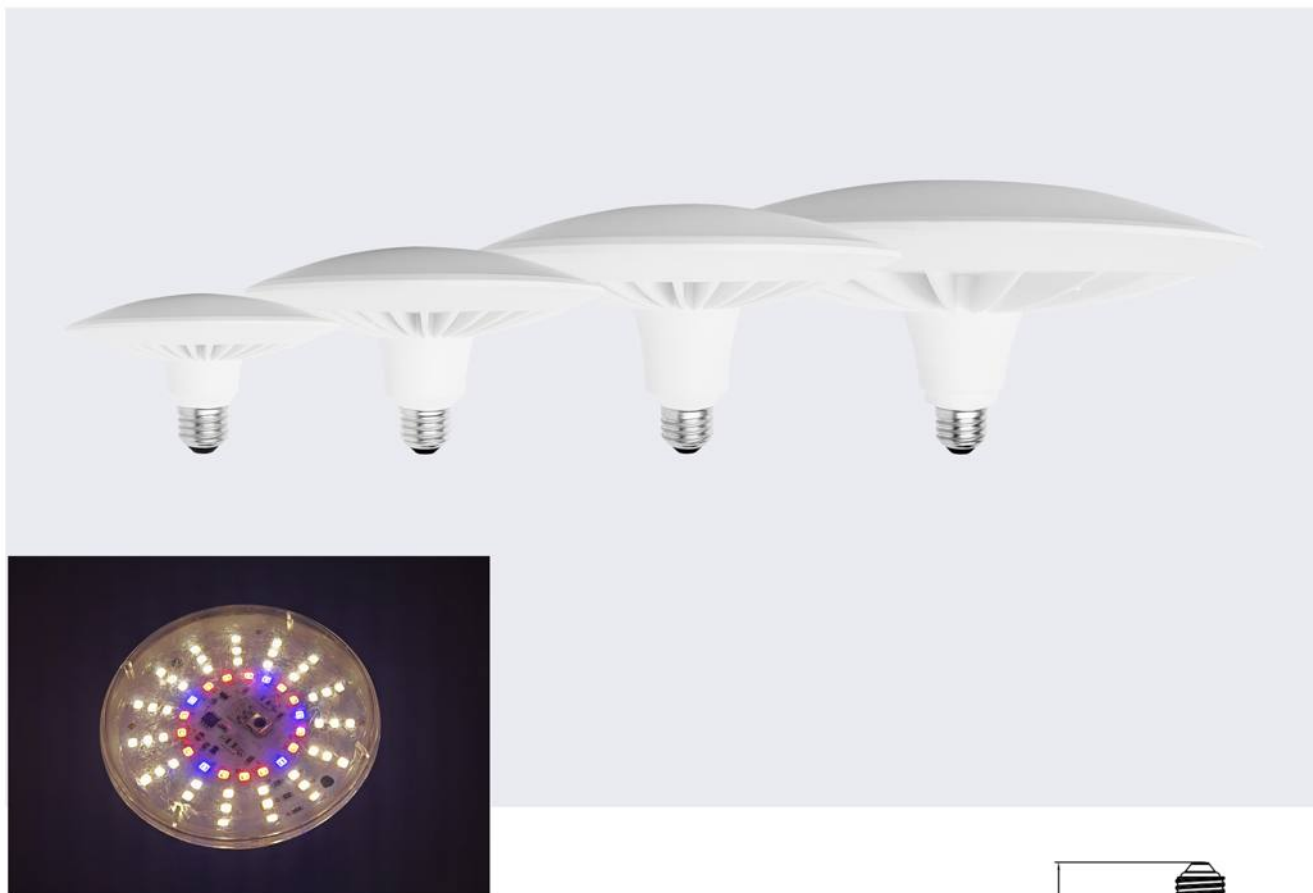

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
FD05	13	580	120	D:150	H:80	0.5	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
FD05	16	715	120	D:160	H:101	0.5	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
FD06	30	1340	120	D:160	H:101	0.7	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
FD08	36	1610	120	D:190	H:122	0.7	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
FD10	50	2235	120	D:235	H:129	0.7	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

T Bulbs



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
T70	24	2160	150	D:70	H:131	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
T80	36	3600	150	D:80	H:143	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
T100	40	3600	150	D:100	H:171	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
T120	50	5400	150	D:120	H:226	0.5	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

Linear lights



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
SYZ01	40	1435	120	D:580	H:44	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)

Collapsible leaves type lights



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover type	Control Mode
TZ30	24	860	120	D:82	H:242	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)
YZ40	35	2625	120	D:102	H:243	0.9	N	DR+B/DR+B+Full Spectrum	Clear/Milky	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

Portable LED Grow Lights



1- Easy install and portable

2-Adjustable angle or height to perfit fit various plants

3-Timer function


4- Full spectrum



Grow Light

Quantum boards

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)	Power Factor	Dimmable	Spectrum	Cover type	Control Mode
Q3030	50	6500	120	D:300 H:300	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q4040	45	1600	120	D:400 H:400	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q4530	100	12000	120	D:450 H:300	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q5050	100	12000	120	D:500 H:500	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)

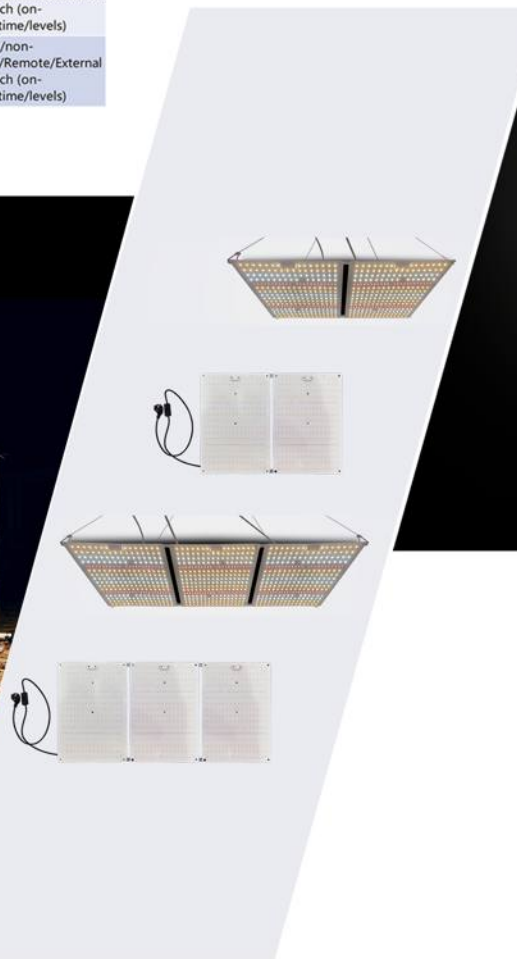

Linkable Quantum Boards

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)	Power Factor	Dimmable	Spectrum	Cover type	Control Mode
Q3030	65	10400	120	D:300 H:300	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q4530	120	16800	120	D:450 H:300	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q4530*2	240	38400	120	D:450 H:600	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q3030*4	240	38400	120	D:600 H:600	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)
Q4530*4	480	75600	120	D:900 H:600	0.9	N	DR+B/DR+B+Full Spectrum	Bare	Dim/non-dim/Remote/External switch (on-off/time/levels)

Grow Light

Suspended Grow Light with hanging system



1- Black Zinc Alloy Wall & Ceiling Cable clips/Cord holder



2- Cable hooks



3- Expansion screws

Grow Light

Hanging Grow Light for Indoor Plant - 2025 New Product



KEY FEATURES:

Aesthetic & Functional – Doubles as a decorative piece while promoting plant health

Height Adjustable – Flexible cord length for versatile placement

Easy Installation – Includes screw kits and fairleads for hassle-free mounting



Grow Light

Hydroponics Growing System



Specification

Wattage: 24W

Voltage: 100-240V

Tank Capacity: Min 3L~ Max 6.5L

Style: 12 Pods

Spectrum: full-spectrum LEDs (3000K + Far-red)

Control Mode: Smart Screen Control

Growing Mode: Vegetables, Flowers, Fruits, Optimal Planting

Key Features

Sunlight simulation

Smart control, no APP needed

Smart screen display

4 growing modes with one-touch switching

Alert system

Adjustable height



Specification

Wattage: 24W

Voltage: 100-240V

Tank Capacity: Min 3L~ Max 6.5L

Style: 12 Pods

Spectrum: full-spectrum LEDs (3000K + Far-red)

Control Mode: Button Control

Growing Mode: Optimal Planting

Key Features

Sunlight simulation

No APP needed

Optimal planting mode for green hand

Alert system

Adjustable height



Grow Light

Indoor soil/hydroponic grow pots



FlexiGrow Pots:
The Next Level Indoor Gardening Solution




► KEY FEATURES:

- Innovative Dual-Layer Design
- Integrated Water Tank
- Flexible Planting Options
- Adjustable Grow Light
- Height Adjustable Bracket



Grow Light

Flood Light Grow Light

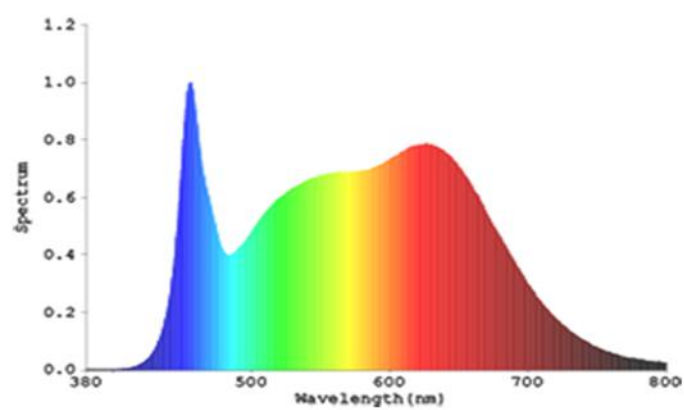

Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable
L-FLP5002-D120D-45	45	3700	180			0.92	N
L-FLP5002-D120D-45	45	2400	180			0.92	N



Grow Light




HEAT LAMP FOR CHICKEN

Voltage: 220-240V | 110-130V | 110-220V

Color/CCT: Infrared


Watt: 175 & 250W

Dimension: D:186 * H:64 MM

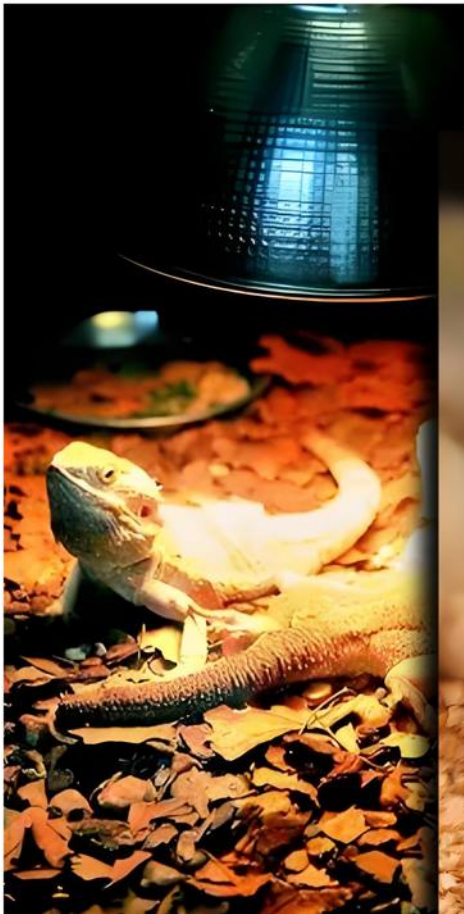


Grow Light

Chicken Grow Lamp



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Cover Type
A60	9	450	180	D:60	H:109	0.7	Y	Bird Gro Spectrum	Clear

LED Timing Grow Lights Series



Model	Watt	Rated Lumen	Beam Angle	Dimension (mm)		Power Factor	Dimmable	Spectrum	Timing
A60	9	680	180	D:60	H:110	0.5	N	DR+B/DR+B+Full Spectrum	3H-6H-12H
BR30	9	560	120	D:94	H:134	0.5	N	DR+B/DR+B+Full Spectrum	3H-6H-12H
PAR38	30	2680	40	D:122	H:137	0.5	N	DR+B/DR+B+Full Spectrum	3H-6H-12H